

## Z Line Technical Manual Addendum

- Download
  - Via Modem
  - Via Ethernet
  - Via GPRS
  - Via WiFi
  - Via USB
  - Via Docking Station
- Performing a Key Exchange
- Setting Up WiFi Connection
- Changing APN for GPRS
- Changing Host Name for Download



## DOWNLOAD VIA MODEM



Follow the steps below for a terminal software download via Modem (Dial) when you are beginning from the idle prompt. Be sure there is an active Phone line connected to the terminal's Modem port on the underneath of the terminal.

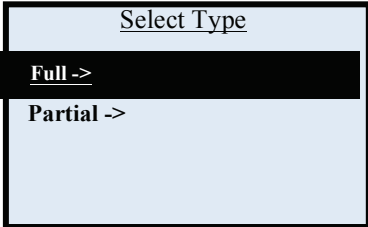
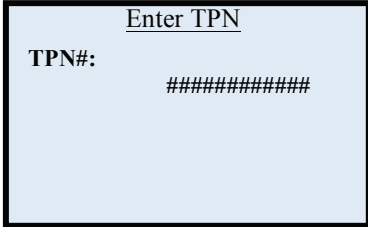

**\*\* Important \*\*** - Always close any open batch prior to downloading a device.

\* Note: FULL DL = Updating Application Software

PARTIAL DL = Updating parameters only

Step	Action		Display
1.	<p>Now that you have created/edited the TPN in the STEAM system you must download the software into the terminal.</p> <p>From the idle prompt press the Green key to access the Core Menu.</p>		
2.	<b>NON TOUCH SCREEN</b>	<b>TOUCH SCREEN</b>	
	<p>Press #4 for UTILITY</p> <p><i>* If prompted input password, default is 1234</i></p>	<p>Using your fingertip TAP the word UTILITY</p> <p><i>* If prompted input password, default is 1234</i></p>	
3.	<b>NON TOUCH SCREEN</b>	<b>TOUCH SCREEN</b>	
	<p>Press #2 for SOFTWARE DOWNLOAD</p>	<p>Using your fingertip TAP the word SOFTWARE DOWNLOAD</p>	
4.	<b>NON TOUCH SCREEN</b>	<b>TOUCH SCREEN</b>	
	<p>Press #1 for CONNECT</p>	<p>Using your fingertip TAP the word CONNECT</p>	
5.	<b>NON TOUCH SCREEN</b>	<b>TOUCH SCREEN</b>	
	<p>Press #2 for DIAL PPP</p>	<p>Using your fingertip TAP DIAL PPP communication method</p>	

## DOWNLOAD VIA MODEM, CONTINUED

Step	Action		Display
	NON TOUCH SCREEN	TOUCH SCREEN	
6.	Press #1 for Full Press #2 for Partial	Using your fingertip TAP the desired download type either FULL or PARTIAL	
7.	Input the unique 10-12 digit alphanumeric TPN you created in the STEAM system and press the Green Key  *Note when inputting a repeated digit pause between entries to avoid scrolling to letters as this entry is alpha numeric capable.		
8.	NON TOUCH SCREEN	TOUCH SCREEN	
	Terminal will display Apply Updates? Press F2 for YES	Terminal will display Apply Updates? Using your Finger Tip TAP the word YES	
9.	The terminal will now download and install your software, reboot and prompt you to confirm the date/time. (this is set in 24 hour clock format only) Once the terminal returns to the idle prompt it will automatically commincate to process a "Key Exchange".		

## DOWNLOAD VIA ETHERNET



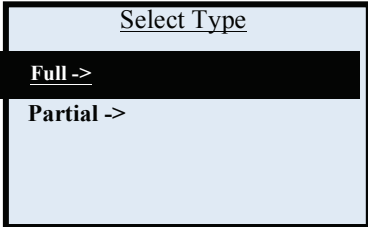
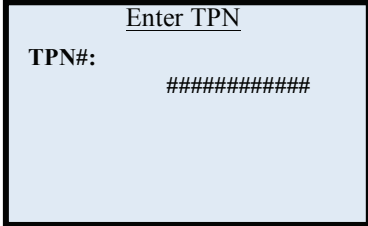

Follow the steps below for a terminal software download via ETHERNET (IP) when you are beginning from the idle prompt. Be sure there is an active LAN cable connected to the terminal's LAN port on the underneath of the terminal.

**\*\* Important \*\*** - Always close any open batch prior to downloading a device.

\* Note: FULL DL = Updating Application Software  
PARTIAL DL = Updating parameters only

Step	Action		Display
1.	<p>Now that you have created/edited the TPN in the STEAM system you must download the software into the terminal.</p> <p>From the idle prompt press the Green key to access the Core Menu.</p>		
2.	<b>NON TOUCH SCREEN</b>	<b>TOUCH SCREEN</b>	
	<p>Press #4 for UTILITY</p> <p><i>* If prompted input password, default is 1234</i></p>	<p>Using your fingertip TAP the word UTILITY</p> <p><i>* If prompted input password, default is 1234</i></p>	
3.	<b>NON TOUCH SCREEN</b>	<b>TOUCH SCREEN</b>	
	<p>Press #2 for SOFTWARE DOWNLOAD</p>	<p>Using your fingertip TAP the word SOFTWARE DOWNLOAD</p>	
4.	<b>NON TOUCH SCREEN</b>	<b>TOUCH SCREEN</b>	
	<p>Press #1 for CONNECT</p>	<p>Using your fingertip TAP the word CONNECT</p>	
5.	<b>NON TOUCH SCREEN</b>	<b>TOUCH SCREEN</b>	
	<p>Press the Green Button for ETHERNET</p>	<p>Using your fingertip TAP ETHERNET communication method</p>	

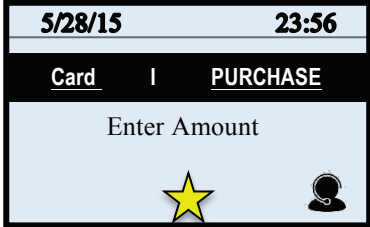
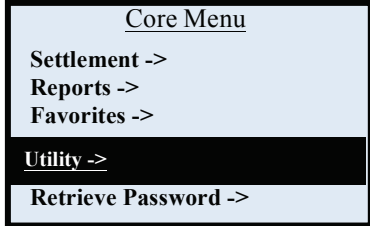
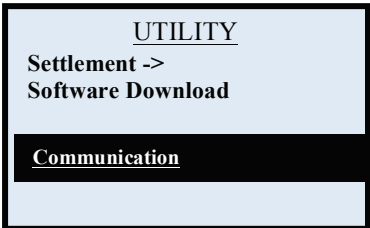
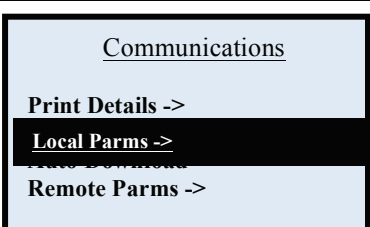
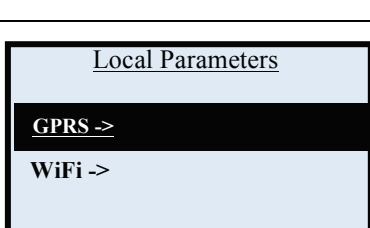
## DOWNLOAD VIA ETHERNET, CONTINUED

Step	Action		Display
	NON TOUCH SCREEN	TOUCH SCREEN	
6.	Press 1 for FULL Or Press 2 for Partial	Using your fingertip TAP the desired download type either FULL or PARTIAL	 <p>The screenshot shows a menu titled "Select Type" with two options: "Full -&gt;" and "Partial -&gt;".</p>
7.	Input the unique 10-12 digit alphanumeric TPN you created in the STEAM system and press the Green Key  *Note when inputting a repeated digit pause between entries to avoid scrolling to letters as this entry is alpha numeric capable.		 <p>The screenshot shows a screen titled "Enter TPN" with a prompt "TPN#:" followed by a line of hash symbols "#####".</p>
8.	Terminal will display Apply Updates? Press F2 for YES	Terminal will display Apply Updates? Using your Finger Tip TAP the word YES	 <p>The screenshot shows a screen titled "Apply Updates?" with two buttons: "YES" and "NO".</p>
9.	The terminal will now download and install your software, reboot and prompt you to confirm the date/time. (this is set in 24 hour clock format only) Once the terminal returns to the idle prompt it will automatically commincate to process a "Key Exchange".		

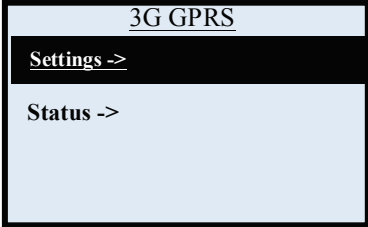
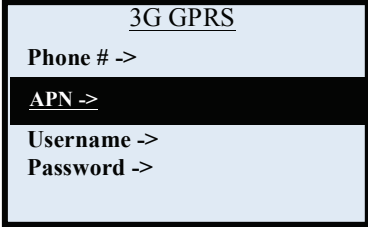

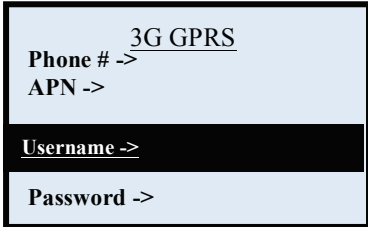
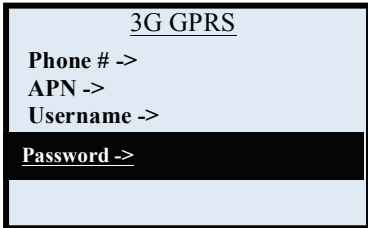
## CHANGING THE SIM APN USERNAME & PASSWORD (GPRS ACCESS POINT)



Follow the steps below changing the default SIM APN access in the terminal, additionally be sure the correct APN is updated in the STEAM system TPN so it does not revert back to the default after a download. APN Username and password is SIM Carrier specific, so you will need advanced knowledge of the correct APN username and password for the desired carrier. Ie: the APN for Telus is: sp.telus.com.

Step	Action	Display
1.	To download via GPRS you first have to set the SIM APN Username and Password.  From the idle prompt press the Green key to access the Core Menu.	
2.	Using your fingertip TAP the word UTILITY <i>* If prompted input password, default is 1234</i>	
3.	Using your fingertip TAP the word COMMUNICATIONS	
4.	Using your fingertip TAP the words LOCAL PARMS	
5.	Using your fingertip TAP GPRS	

## CHANGING THE SIM APN USERNAME & PASSWORD, CONTINUED

Step	Action	Display
6.	Using your fingertip TAP the word SETTINGS	 <p>A screenshot of a mobile phone's settings menu. At the top, it says "3G GPRS". Below that, there are two options: "Settings -&gt;" and "Status -&gt;".</p>
7.	Using your fingertip TAP the word APN	 <p>A screenshot of a mobile phone's settings menu. At the top, it says "3G GPRS". Below that, there are four options: "Phone # -&gt;", "APN -&gt;", "Username -&gt;", and "Password -&gt;".</p>
8.	<p>The default APN will appear. Use the backspace key to clear out the default APN.</p> <p>Use the key pad to input the desired APN for the SIM</p>	 <p>A screenshot of a mobile phone's settings menu. At the top, it says "3G GPRS". Below that, the text "Dejavoo.global.m2m.net" is displayed in the APN field.</p>
9.	<p>If an APN requires a Username, using your fingertip tap the word Username</p> <p>Use the keypad to input the correct Username for that APN</p>	 <p>A screenshot of a mobile phone's settings menu. At the top, it says "3G GPRS". Below that, there are four options: "Phone # -&gt;", "APN -&gt;", "Username -&gt;", and "Password -&gt;". The "Username -&gt;" option is highlighted with a black bar.</p>
10.	<p>If an APN requires a Password, using your fingertip tap the word Password</p> <p>Use the keypad to input the correct Password for that APN</p>	 <p>A screenshot of a mobile phone's settings menu. At the top, it says "3G GPRS". Below that, there are four options: "Phone # -&gt;", "APN -&gt;", "Username -&gt;", and "Password -&gt;". The "Password -&gt;" option is highlighted with a black bar.</p>

## DOWNLOAD VIA GPRS



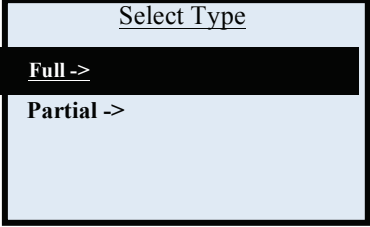
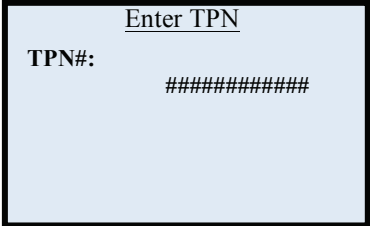

Follow the steps below for a terminal software download via GPRS when you are beginning from the idle prompt. It is IMPORTANT to note that downloading over GPRS will use SIM Data, a USB download or download through a Docking station is alternatively recommended. You will first need to change the SIM APN access in the terminal, additionally be sure the correct APN is updated in the STEAM system TPN.  
**\*\* Important \*\*** - Always close any open batch prior to downloading a device.

\* Note: FULL DL = Updating Application Software  
 PARTIAL DL = Updating parameters only

Step	Action	Display
1.	Now that you have created/edited the TPN in the STEAM system you must download the software into the terminal.  From the idle prompt press the Green key to access the Core Menu.	
2.	Using your fingertip TAP the word UTILITY <i>* If prompted input password, default is 1234</i>	
3.	Using your fingertip TAP the word SOFTWARE DOWNLOAD	
4.	Using your fingertip TAP the word CONNECT	
5.	Using your fingertip TAP GPRS communication method	



## DOWNLOAD VIA GPRS, CONTINUED

Step	Action	Display
6.	Using your fingertip TAP the desired download type either FULL or PARTIAL	 <p>The screenshot shows a terminal window with the text "Select Type" at the top. Below it, there are two options: "Full -&gt;" and "Partial -&gt;". The "Full -&gt;" option is highlighted with a black background and white text.</p>
7.	<p>Input the unique 10-12 digit alphanumeric TPN you created in the STEAM system and press the Green Key</p> <p>*Note when inputting a repeated digit pause between entries to avoid scrolling to letters as this entry is alpha numeric capable.</p>	 <p>The screenshot shows a terminal window with the text "Enter TPN" at the top. Below it, there is a prompt "TPN#: " followed by a series of hash symbols "#####".</p>
8.	Terminal will display Apply Updates? Using your Finger Tip TAP the word YES	 <p>The screenshot shows a terminal window with the text "Apply Updates?" at the top. Below it, there are two buttons: "YES" and "NO".</p>
9.	The terminal will now download and install your software, reboot and prompt you to confirm the date/time. (this is set in 24 hour clock format only) Once the terminal returns to the idle prompt it will automatically communicate to process a "Key Exchange".	

# SETTING UP WiFi COMMUNICATION

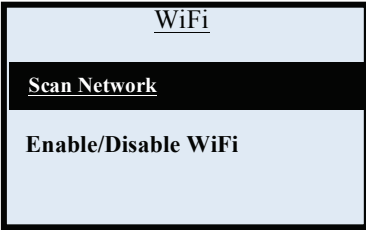
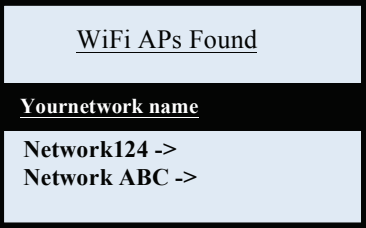
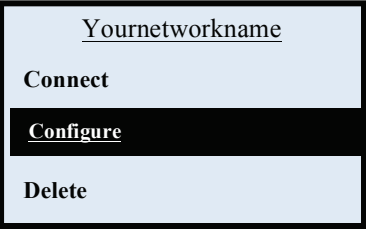
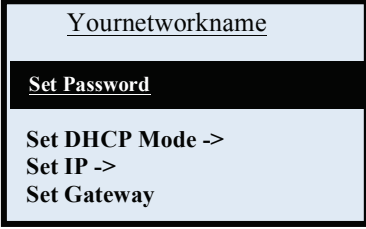
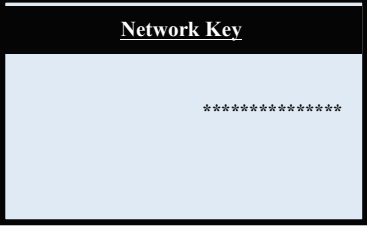


Follow the steps below to connect your terminal device to your WiFi network.

**\*\* Note:** WiFi Network must support WPA2 Security  
WiFi Router must support min speed of 2.4 GHz

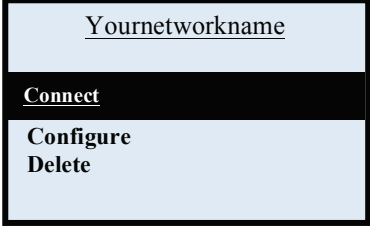
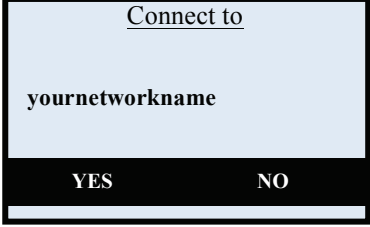
Step	Action		Display
1.	From the idle prompt press the Green key to access the Core Menu.		
2.	<b>NON TOUCH SCREEN</b>	<b>TOUCH SCREEN</b>	
	Press #4 for UTILITY <i>* If prompted input password, default is 1234</i>	Using your fingertip TAP the word UTILITY <i>* If prompted input password, default is 1234</i>	
3.	<b>NON TOUCH SCREEN</b>	<b>TOUCH SCREEN</b>	
	Press #3 for COMMUNICATIONS	Using your fingertip TAP the word COMMUNICATIONS	
4.	<b>NON TOUCH SCREEN</b>	<b>TOUCH SCREEN</b>	
	Press #2 for LOCAL PARMS	Using your fingertip TAP the words LOCAL PARMS	
5.	<b>NON TOUCH SCREEN</b>	<b>TOUCH SCREEN</b>	
	Press #3 for WiFi	Using your fingertip TAP WiFi communication method	

# SETTING UP WIFI COMMUNICATION, CONTINUED

Step	Action		Display
	NON TOUCH SCREEN	TOUCH SCREEN	
6.	Press #1 for SCAN NETWORK  * A list of found available networks displays	Using your fingertip TAP the words SCAN NETWORK  * A list of found available networks displays	 <p>The screenshot shows a menu with the title "WiFi". Below the title, there are three options: "Scan Network", "Enable/Disable WiFi", and "Set Password". The "Scan Network" option is highlighted with a black bar.</p>
7.	Find your network name on the list of available networks and Tap your finger on the network name to select it		 <p>The screenshot shows a menu with the title "WiFi APs Found". Below the title, there is a list of network names: "Yournetwork name", "Network124 -&gt;", and "Network ABC -&gt;". The "Yournetwork name" option is highlighted with a black bar.</p>
8.	Press #2 for CONFIGURE	Using your fingertip TAP the word CONFIGURE	 <p>The screenshot shows a menu with the title "Yournetworkname". Below the title, there are three options: "Connect", "Configure", and "Delete". The "Configure" option is highlighted with a black bar.</p>
9.	Press #1 for SET PASSWORD	Using your fingertip TAP the words SET PASSWORD	 <p>The screenshot shows a menu with the title "Yournetworkname". Below the title, there are four options: "Set Password", "Set DHCP Mode -&gt;", "Set IP -&gt;", and "Set Gateway". The "Set Password" option is highlighted with a black bar.</p>
10.	Use the alphanumeric key pad to input the password for your WPA2 Network Key (Password)  Press the Green button when completed		 <p>The screenshot shows a screen with the title "Network Key". Below the title, there is a large text input field containing a series of asterisks (*****).</p>

## SETTING UP WIFI COMMUNICATION, CONTINUED

---

Step	Action		Display
	NON TOUCH SCREEN	TOUCH SCREEN	
11.	Press the Yellow Back Space Key  Press #1 for Connect	Press the Yellow Backspace Key Using your finger tap the word CONNECT	
12.	Press F2 for Yes to confirm connection to your network	Using your fingertip TAP the word YES To confirm connection to your network	
13.	The terminal will connect to your WiFi Network and the return to the idle prompt. The WiFi icon will be lit up in black indicating WiFi is connected.		

# DOWNLOADING VIA WiFi

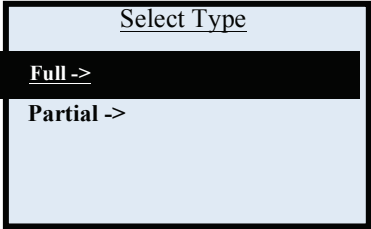
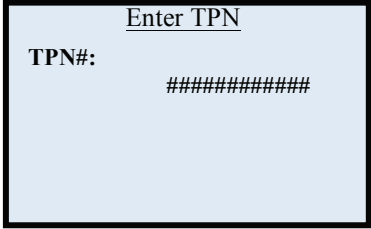



Follow the steps below for a terminal software download via ETHERNET (IP) when you are beginning from the idle prompt. Be sure there is an active LAN cable connected to the terminal's LAN port on the underneath of the terminal. **\*\* Important \*\*** - Always close any open batch prior to downloading a device.

**\*\* Note:** FULL DL = Updating Application Software  
PARTIAL DL = Updating parameters only

Step	Action		Display
1.	<p>Now that you have created/edited the TPN in the STEAM system you must download the software into the terminal.</p> <p>From the idle prompt press the Green key to access the Core Menu.</p>		
2.	<b>NON TOUCH SCREEN</b>	<b>TOUCH SCREEN</b>	
	<p>Press #4 for UTILITY</p> <p><i>* If prompted input password, default is 1234</i></p>	<p>Using your fingertip TAP the word UTILITY</p> <p><i>* If prompted input password, default is 1234</i></p>	
3.	<b>NON TOUCH SCREEN</b>	<b>TOUCH SCREEN</b>	
	<p>Press #3 for SOFTWARE DOWNLOAD</p>	<p>Using your fingertip TAP the word SOFTWARE DOWNLOAD</p>	
4.	<b>NON TOUCH SCREEN</b>	<b>TOUCH SCREEN</b>	
	<p>Press #1 for CONNECT</p>	<p>Using your fingertip TAP the word CONNECT</p>	
5.	<b>NON TOUCH SCREEN</b>	<b>TOUCH SCREEN</b>	
	<p>Press #3 for WiFi</p>	<p>Using your fingertip TAP WiFi communication method</p>	

## DOWNLOADING VIA WiFi, CONTINUED

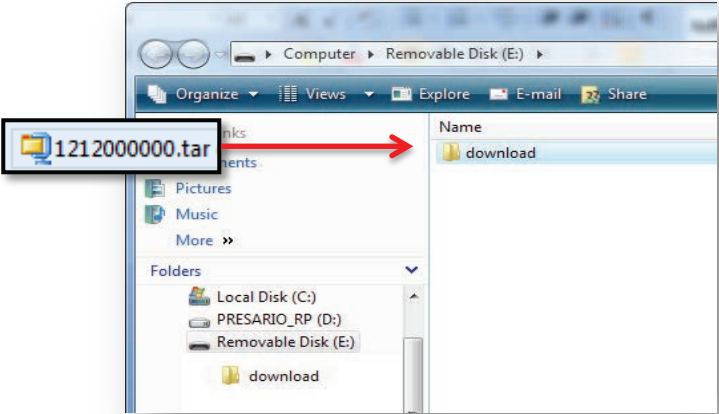

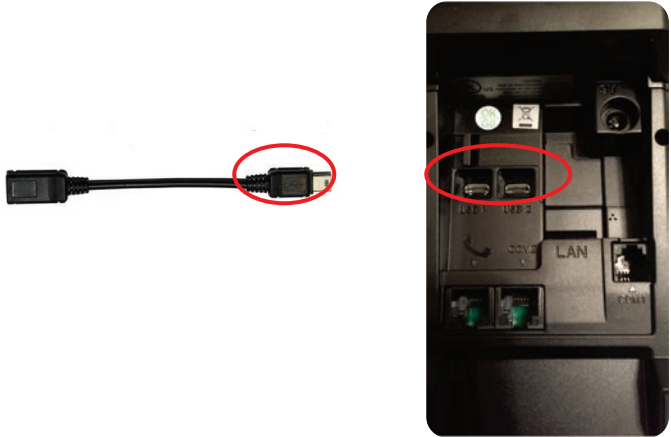
Step	Action		Display
	NON TOUCH SCREEN	TOUCH SCREEN	
1.	Press 1 for FULL Or Press 2 for Partial	Using your fingertip TAP the desired download type either FULL or PARTIAL	
2.	Input the unique 10-12 digit alphanumeric TPN you created in the STEAM system and press the Green Key  *Note when inputting a repeated digit pause between entries to avoid scrolling to letters as this entry is alpha numeric capable.		
3.	Terminal will display Apply Updates? Press F2 for YES	Terminal will display Apply Updates? Using your Finger Tip TAP the word YES	
4.	The terminal will now download and install your software, reboot and prompt you to confirm the date/time. (this is set in 24 hour clock format only) Once the terminal returns to the idle prompt it will automatically commincate to process a "Key Exchange".		

## DOWNLOAD VIA USB


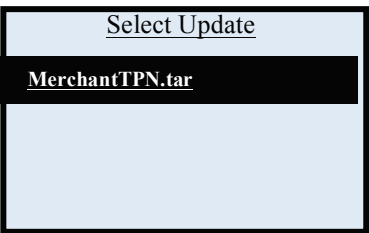



The versatility of Dejavoo terminals enables software installation quickly and easily with a USB key using the Mini USB port and the Mini USB to USB adaptor cable included in your terminal package. The .TAR software file to be installed must be placed on the USB key in a folder named “download” on the root directory.

**\*Note:** The .TAR file does not need to be uncompressed and the download folder needs to be named “download” without any spaces.

Step	Action	Display
1.	<ul style="list-style-type: none"> <li>• Insert the USB key into your computer, find the USB key (removable disk) on your list of drives, click on it to access the USB drive.</li> <li>• Create a new folder on your USB root directory and call it “download”.</li> <li>• Place the .TAR File (Terminal Profile) you downloaded from the STEAM system into a folder you just created named download on the root directory of your USB Key.</li> </ul> <p><b>*Note:</b> The .TAR file does not need to be uncompressed and the download folder needs to be named “download” without any spaces.</p>	
2.	<p>In Your Z Series Terminal Packaging find the Mini B Male USB to Female A USB adaptor.</p> <p>(See Image on right)</p>	
3.	<p>Plug the smaller male USB end into the Mini USB 1 port found on the underside of the terminal. (turn the terminal over)</p>	

## DOWNLOAD VIA USB, CONTINUED

Step	Action		Display
4.	<ul style="list-style-type: none"> <li>Turn the over the Dejavo terminal so it is right side up, make sure it is powered ON.</li> <li>Eject your USB key from your Computer and insert the USB key into the larger Female end of the adaptor you connected to the terminal in step 3. (See image at right)</li> </ul>		
5.	<ul style="list-style-type: none"> <li>The terminal will display "Reading USB Directory"</li> <li>The TPN file(s) you placed in the download folder will appear on the terminal display.</li> </ul>		
6.	<p><b>NON TOUCH SCREEN</b></p> <p>Press the Green button to select the TPN on the terminal display</p> <p>Terminal will display Apply Updates? Press F2 for YES</p>	<p><b>TOUCH SCREEN</b></p> <p>Use your finger to Tap the TPN on the terminal display</p> <p>Terminal will display Apply Updates? Using your Finger Tip TAP the word YES</p>	
7.	<p>The terminal will now download and install your software, reboot and prompt you to confirm the date/time. (this is set in 24 hour clock format only) Once the terminal returns to the idle prompt it will automatically commincate to process a "Key Exchange".</p>		



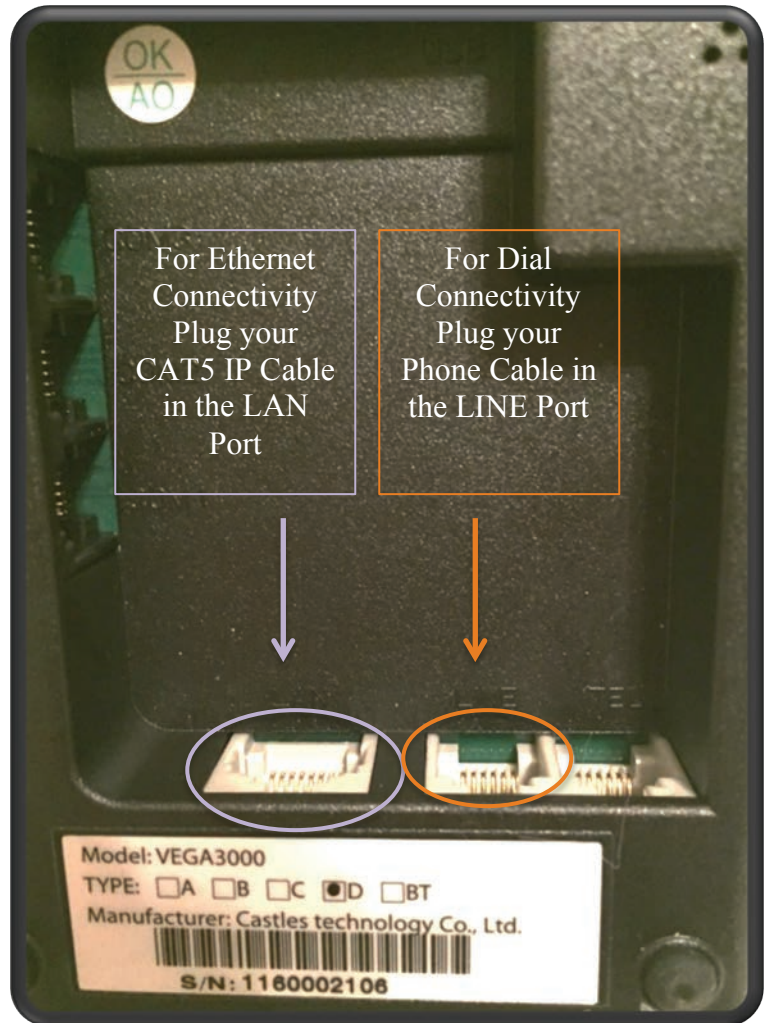
## DOWNLOAD VIA Z9 DOCKING STATION



The Z9 Docking station provides alternative communication of Ethernet (IP) and Modem (Dial) to the Dejavoo Z9 Mobile terminal. Simply connect the desired communication option to the appropriate port and place the Z9 onto the docking station. See image below:



Front of Z9 Docking Station



Underneath of Z9 Docking Station

Download Type	Action
Ethernet Download Using Docking Station	<ul style="list-style-type: none"> <li>• Plug CAT5 IP Cable into LAN Port</li> <li>• Place Z9 on Dock</li> <li>• Follow Instructions on Page X to download via Ethernet</li> </ul>
Modem Download Using Docking Station	<ul style="list-style-type: none"> <li>• Plug Phone Cable into LINE Port</li> <li>• Place Z9 on Dock</li> <li>• Follow Instructions on Page X to download via Modem</li> </ul>

# DOWNLOAD SETTINGS – CHANGING HOST NAME

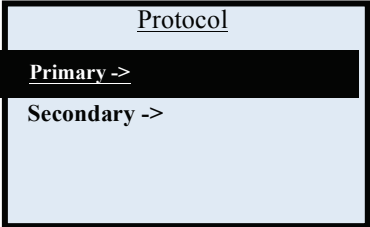
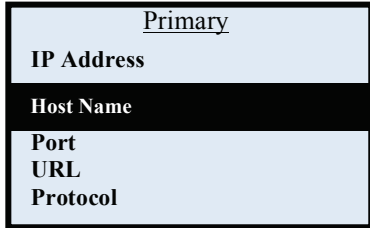
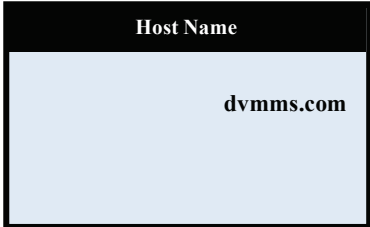


**\*\* Important Note \*\*** - The download Host Name defaults to DVMMS.COM which is the Dejavoo download server. It is not recommended that you change the host name unless you are downloading from a test server which should not be done with a production unit.

Step	Action		Display
1.	<p>Now that you have created/edited the TPN in the STEAM system you must download the software into the terminal.</p> <p>From the idle prompt press the Green key to access the Core Menu.</p>		
2.	<b>NON TOUCH SCREEN</b>	<b>TOUCH SCREEN</b>	
	Press #4 for UTILITY <i>* If prompted input password, default is 1234</i>	Using your fingertip TAP the word UTILITY <i>* If prompted input password, default is 1234</i>	
3.	<b>NON TOUCH SCREEN</b>	<b>TOUCH SCREEN</b>	
	Press #2 for SOFTWARE DOWNLOAD	Using your fingertip TAP the words SOFTWARE DOWNLOAD	
4.	<b>NON TOUCH SCREEN</b>	<b>TOUCH SCREEN</b>	
	Press #2 for SETTINGS	Using your fingertip TAP the word SETTINGS	
5.	<b>NON TOUCH SCREEN</b>	<b>TOUCH SCREEN</b>	
	Press #5 for PROTOCOL	Using your fingertip TAP the word PROTOCOL	

## DOWNLOAD SETTINGS – CHANGING HOST NAME, CONTINUED

---

Step	Action		Display
	NON TOUCH SCREEN	TOUCH SCREEN	
1.	Press #1 for PRIMARY	Using your fingertip TAP the word PRIMARY	
2.	Press #2 for HOST NAME	Using your fingertip TAP the words HOST NAME	
3.	<p>The terminal will display the default Host Name of dvmms.com – this is the Dejavoo Production Server for downloads and should be used when downloading a TPN from Dejavoo.</p> <p>To Change the default Host Name:</p> <ul style="list-style-type: none"> <li>• Use the Yellow Back space key to clear out the default name.</li> <li>• Use the alphanumeric keypad to input the new Host Name</li> <li>• Press the Green button</li> </ul>		

# PERFORMING A KEY EXCHANGE



After a download the terminal should automatically communicate out to perform a key exchange, in the event you need to manual perform a key exchange please use the steps below as your guide.

Step	Action		Display
1.	From the idle prompt press the Green key to access the Core Menu.		
2.	<b>NON TOUCH SCREEN</b>	<b>TOUCH SCREEN</b>	
	Press #6 for APPLICATIONS	Using your fingertip TAP APPLICATIONS	
3.	<b>NON TOUCH SCREEN</b>	<b>TOUCH SCREEN</b>	
	Press #1 for Credit/Debit/EBT	Using your fingertip TAP Credit/Debit/EBT	
4.	<b>NON TOUCH SCREEN</b>	<b>TOUCH SCREEN</b>	
	Press #2 for HOST UTILITY <i>* If prompted input password, default is 1234</i>	Using your fingertip TAP the words HOST UTILITY <i>* If prompted input password, default is 1234</i>	
5.	<b>NON TOUCH SCREEN</b>	<b>TOUCH SCREEN</b>	
	Press #7 for KEY EXCHANGE	Using your fingertip TAP the words KEY EXCHANGE	
6.	The terminal communicates to the host for the key exchange. When completed it will return to the Host Utility Menu. Press the Red X button 5 Times to return to the idle prompt.		

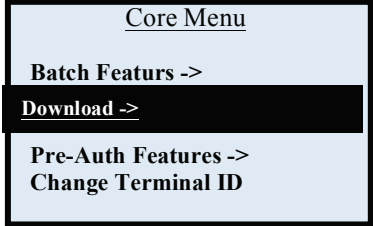
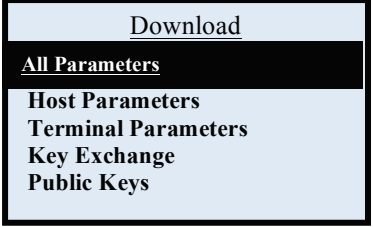
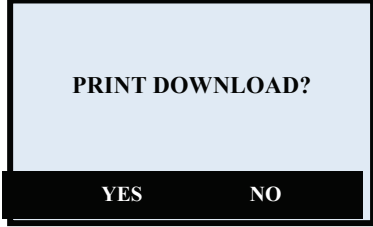
# DOWNLOADING HOST PARAMETERS



Use the steps below to download parameters from the Host in the Credit/Debit Application.

Step	Action		Display
1.	From the idle prompt press the Green key to access the Core Menu.		
2.	<b>NON TOUCH SCREEN</b>	<b>TOUCH SCREEN</b>	
	Press #6 for APPLICATIONS	Using your fingertip TAP APPLICATIONS	
3.	<b>NON TOUCH SCREEN</b>	<b>TOUCH SCREEN</b>	
	Press #1 for Credit/Debit/EBT	Using your fingertip TAP Credit/Debit/EBT	
4.	<b>NON TOUCH SCREEN</b>	<b>TOUCH SCREEN</b>	
	Press #2 for HOST UTILITY <i>* If prompted input password, default is 1234</i>	Using your fingertip TAP the words HOST UTILITY <i>* If prompted input password, default is 1234</i>	
5.	<b>NON TOUCH SCREEN</b>	<b>TOUCH SCREEN</b>	
	Press #8 for (Host Name) Features	Using your fingertip TAP the words (HOST NAME) FEATURES	

## DOWNLOADING HOST PARAMETERS, CONTINUED

Step	Action		Display
	NON TOUCH SCREEN	TOUCH SCREEN	
6.	Press #2 for DOWNLOAD	Using your fingertip TAP DOWNLOAD	 <p>Core Menu</p> <p>Batch Features -&gt;</p> <p><b>Download -&gt;</b></p> <p>Pre-Auth Features -&gt;</p> <p>Change Terminal ID</p>
7.	Press #1 for ALL PARAMETERS	Using your fingertip TAP ALL PARAMETERS	 <p>Download</p> <p><b>All Parameters</b></p> <p>Host Parameters</p> <p>Terminal Parameters</p> <p>Key Exchange</p> <p>Public Keys</p>
8.	The terminal downloads the parameters and may prompt to print	Using your fingertip TAP the word NO	 <p>PRINT DOWNLOAD?</p> <p>YES NO</p>
	Press the F4 Key For NO		