




Redfish ACD

(Advanced Communication Devices)

Jeff Hilland
HPE

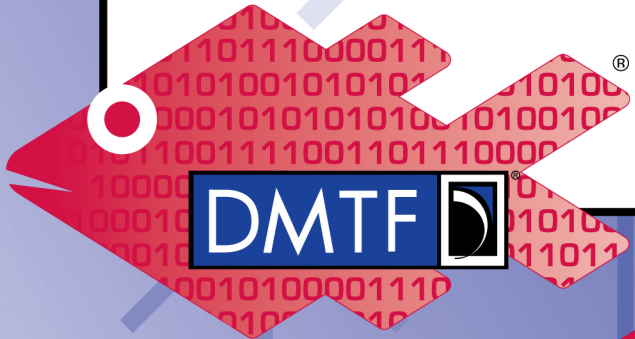

Redfish



Agenda

- ACD Overview
- ACD Resource Overview and Map
- Examples





Redfish for Advanced Communication Devices

- Support released in Redfish 2016.3
- Advanced Communication Devices may include:
 - Ethernet NICs,
 - Fibre Channel HBAs,
 - Future possibility of supporting RDMA, Infiniband HCAs, and other communication components.
- **Newly Defined Entities (Objects) for ACD**
 - NetworkInterface & NetworkInterfaceCollection
 - NetworkAdapter & NetworkAdapterCollection
 - NetworkPort & NetworkPortCollection
 - NetworkDeviceFunction & NetworkDeviceFunctionCollection



Resource Overview

- **Network Interface:** System view of the adapter.
 - Links arrays to NetworkAdapter, NetworkPort, and NetworkDeviceFunction
- **Network Adapter:** Physical view of the adapter.
 - NetworkAdapter contains an array of controllers.
 - Each controller contains links to the NetworkDeviceFunction & NetworkPort.
 - The controller array is provided to handle modeling adapters that have multiple controllers




Resource Overview


- **Network Interface:** System view of the adapter.
 - Links arrays to NetworkAdapter, NetworkPort, and NetworkDeviceFunction
 - Different than Network Adapter because it may be just a part of the adapter in a composable system
- **Network Adapter:** Physical view of the adapter.
 - NetworkAdapter contains an array of controllers.
 - Each controller contains links to the NetworkDeviceFunction & NetworkPort.
 - The controller array is provided to handle modeling adapters that have multiple controllers
 - Each controller may contain a link to corresponding PCIeDevice instances.




Resource Overview

- **Network Port:** Often the physical port.
 - Represents the NetworkAdapter ports (often a physical port) including the configuration, capabilities and status.
- **Network Device Function:** Most of the device configuration (NIC, HBA, etc.)
 - The NetworkDeviceFunction provides a network adapter-centric view of a function allocated to a NetworkInterface and located on a NetworkAdapter.
 - The NetworkDeviceFunction exposes the capabilities, configuration, and status of a physical function.
 - The NetworkDeviceFunction may contain a link to a correlated PCIeFunction instance.
 - The NetworkDeviceFunction contains a link to a NetworkPort.

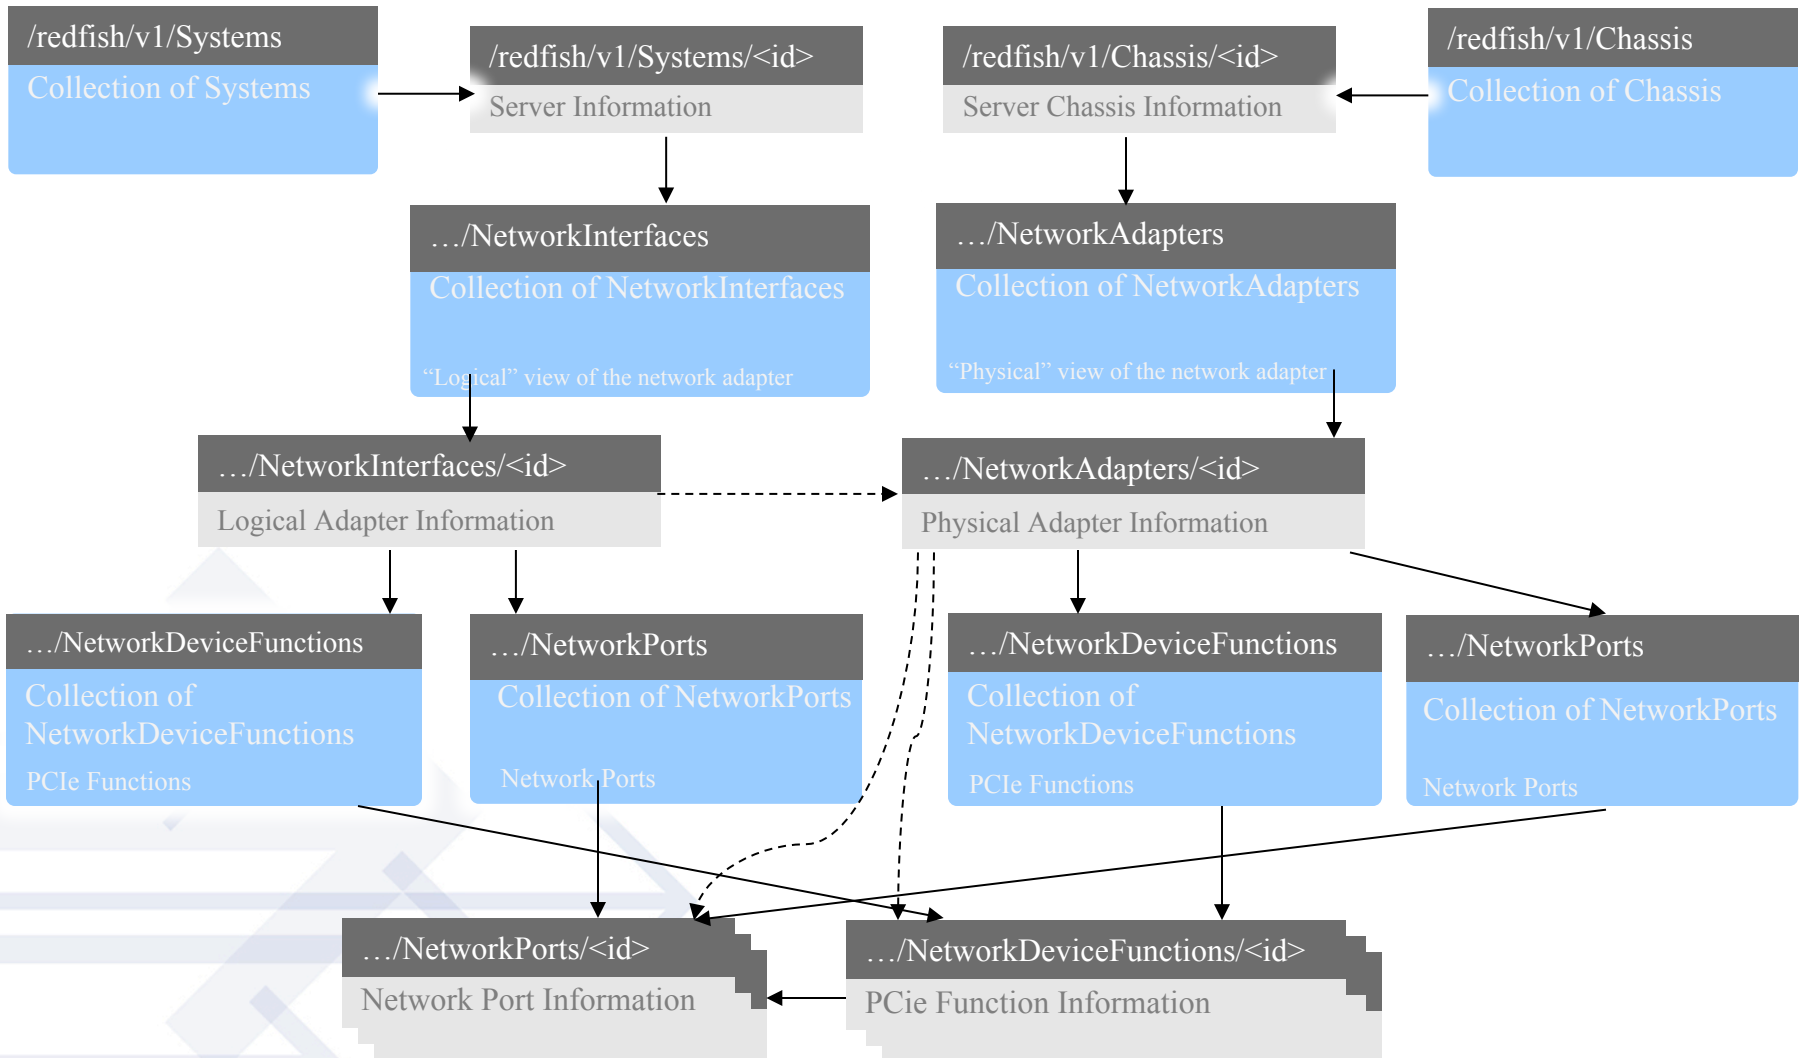

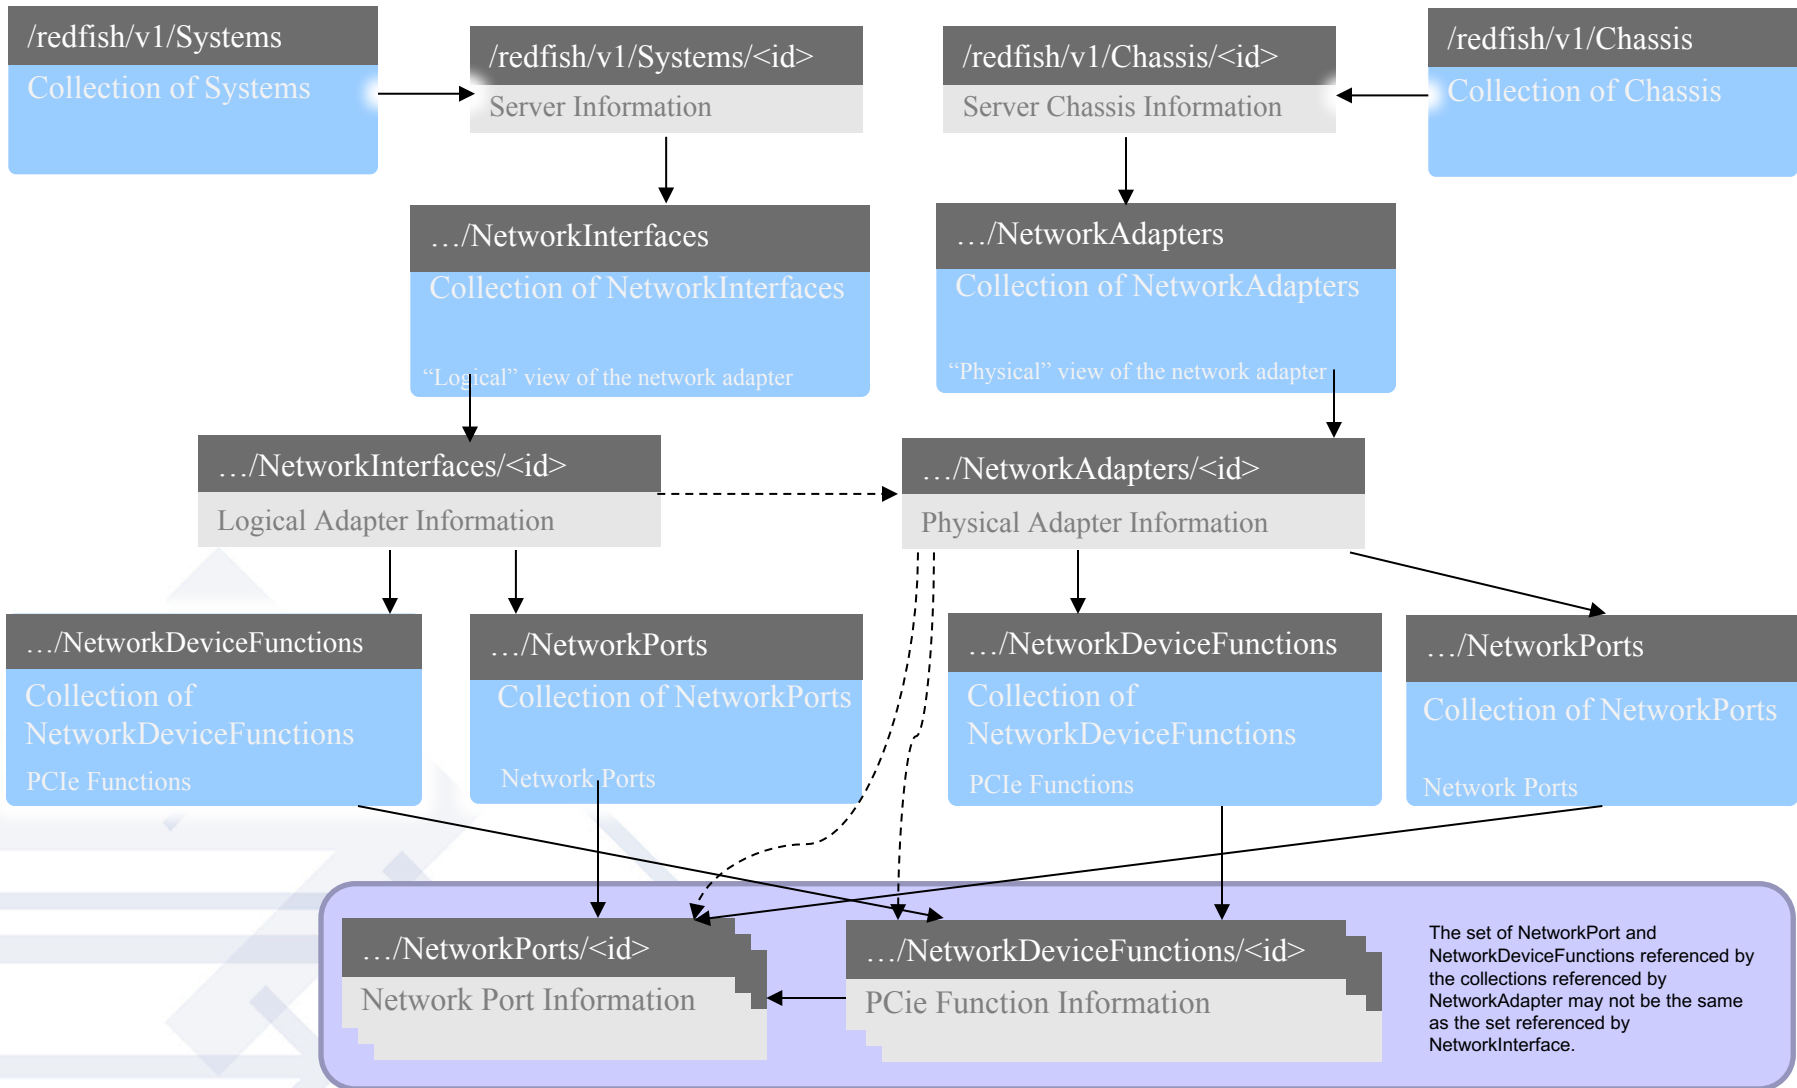

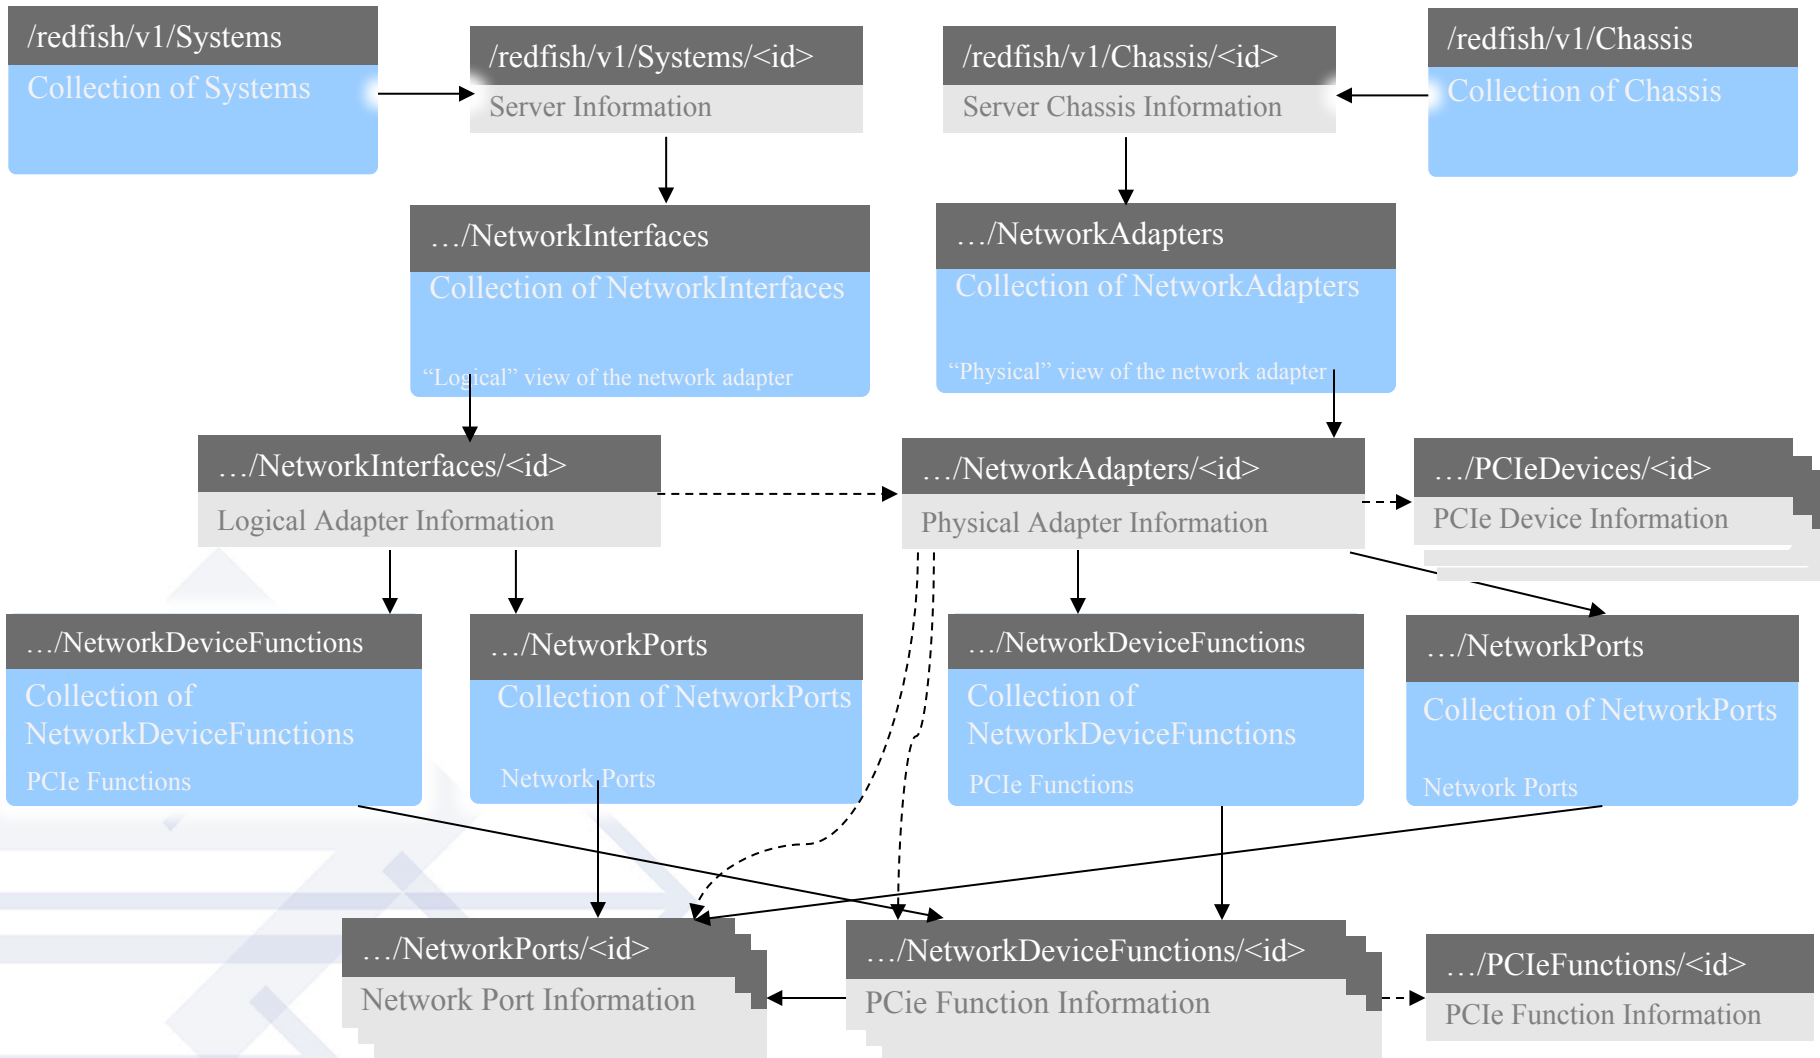



Network Interface (in System)

```
{
  "@odata.id": "/redfish/v1/Systems/1/NetworkInterfaces/9fd725a1",
  "@odata.type": "#NetworkInterface.v1_0_0.NetworkInterface",
  "Id": "9fa725a1",
  "Name": "Network Device View",
  "NetworkPorts": {
    "@odata.id": "/redfish/v1/Systems/1/NetworkInterfaces/9fd725a1/NetworkPorts"
  },
  "NetworkDeviceFunctions": {
    "@odata.id": "/redfish/v1/Systems/1/NetworkInterfaces/9fd725a1/NetworkDeviceFunctions"
  },
  "Links": {
    "NetworkAdapter": {
      "@odata.id": "/redfish/v1/Chassis/1/NetworkAdapters/9fd725a1"
    }
  }
}
```

"@odata.id": "/redfish/v1/Systems/1/NetworkInterfaces/9fd725a1/NetworkPorts"	System NetworkPorts
"@odata.id": "/redfish/v1/Systems/1/NetworkInterfaces/9fd725a1/NetworkDeviceFunctions"	System NetworkFunctions
"@odata.id": "/redfish/v1/Chassis/1/NetworkAdapters/9fd725a1"	Chassis NetworkAdapter



Network Adapter (in Chassis)

```
{
  "@odata.id": "/redfish/v1/Chassis/1/NetworkAdapters/9fd725a1",
  "@odata.type": "#NetworkAdapter.v1_0_0.NetworkAdapter",
  "NetworkPorts": {
    "@odata.id": "/redfish/v1/Chassis/1/NetworkAdapters/9fd725a1/NetworkPorts"
  },
  "NetworkDeviceFunctions": {
    "@odata.id": "/redfish/v1/Chassis/1/NetworkAdapters/9fd725a1/NetworkDeviceFunctions"
  },
  "Controllers": [
    {
      "FirmwarePackageVersion": "7.4.10",
      "Links": {
        "PCIeDevices": [
          {"@odata.id": "/redfish/v1/Chassis/1/PCIeDevices/NIC"}
        ],
        "NetworkPorts": [
          {"@odata.id": "/redfish/v1/Chassis/1/NetworkAdapters/9fd725a1/NetworkPorts/1"}
        ],
        "NetworkDeviceFunctions": [
          {"@odata.id": "/redfish/v1/Chassis/1/NetworkAdapters/9fd725a1/NetworkDeviceFunctions/1"}
        ]
      }
    }
  ],
}
```

Chassis
NetworkPorts

Chassis
NetworkFunctions

Chassis
PCIe Info

Controller's
NetworkPorts &
Network Functions

Continued on next slide



Network Adapter (in Chassis) has Capabilities Structure

```
"ControllerCapabilities": {
```

```
  "NetworkPortCount": 2,
  "NetworkDeviceFunctionCount": 8,
  "DataCenterBridging": {"Capable": true },
  "VirtualizationOffload": {
```

Physical Port count,
Physical Func count
DCB

```
    "VirtualFunction": {
      "DeviceMaxCount": 256,
      "NetworkPortMaxCount": 128,
      "MinAssignmentGroupSize": 4
```

Virtual Func Info
Max Vdevice, port
group size

```
    },
```

```
    "SRIOV": {
      "SRIOVVEPACapable": true
    }
```

SRIOV

```
  },
```

```
  "NPIV": {
    "MaxDeviceLogins": 4,
    "MaxPortLogins": 2
  }
```

N_Port ID Virt

```
  }
```

```
}
```

```
],
```

```
"Actions": {
  "#NetworkAdapter.ResetSettingsToDefault": {
    "target": "/redfish/v1/Chassis/1/NetworkAdapters/9fd725a1/Actions/NetworkAdapter.Reset"
  }
}
```

Action

```
}
```



Network Device Function (in Chassis, referenced by System

```
"@odata.id": "/redfish/v1/Chassis/1/NetworkAdapters/9fd725a1/NetworkDeviceFunctions/111111111100",
"@odata.type": "#NetworkDeviceFunction.v1_0_0.NetworkDeviceFunction",
"Id": "111111111100",
```

```
"NetDevFuncType": "Ethernet",
"DeviceEnabled": true,
"NetDevFuncCapabilities": [
  "Ethernet", "FibreChannel"
```

Current Function Type,
Enabled,
Function Capabilities

```
],
"Ethernet": {
  "MACAddress": "00:0C:29:9A:98:ED",
  ...
},
```

Properties for
Ethernet modes (snipped)

```
"iSCSIBoot": {
  "IPAddressType": "IPv4",
  ...
},
```

iSCSIBoot properties
(snipped)

```
"FibreChannel": {
  "WWPN": "10:00:B0:5A:DD:BB:74:E0",
  ...
},
```

FC info (snipped)

```
"AssignablePhysicalPorts": [
  {"@odata.id": "/redfish/v1/Chassis/1/NetworkAdapters/9fd725a1/NetworkPorts/1"}
],
"PhysicalPortAssignment": {
  "@odata.id": "/redfish/v1/Chassis/1/NetworkAdapters/9fd725a1/NetworkPorts/1"
```

Port Assignments

```
},
"BootMode": "Disabled",
"VirtualFunctionsEnabled": true,
"MaxVirtualFunctions": 16,
"Links": {
  "PCIeFunction": {"@odata.id": "/redfish/v1/Chassis/1/PCIeDevices/NIC/Functions/1"}
}
```



Network Ports (in Chassis, referenced by System

```
{
  "@odata.id": "/redfish/v1/Chassis/1/NetworkAdapters/9fd725a1/NetworkPorts/1",
  "@odata.type": "#NetworkPort.v1_0_0.NetworkPort",
  "Id": "1",
  "Name": "Network Port View",
  "PhysicalPortNumber": "1",
  "LinkStatus": "Up",
  "SupportedLinkCapabilities": [
    {"LinkNetworkTechnology": "Ethernet", "LinkSpeedMbps": 10000
  ],
  "ActiveLinkTechnology": "Ethernet",
  "SupportedEthernetCapabilities": [
    "WakeOnLAN", "LLDP", "PoE", "EEE"
  ],
  "NetDevFuncMinBWAlloc": [ {
    "NetworkDeviceFunction": {"@odata.id": "/redfish/v1/Chassis/1/NetworkAdapters/9fd725a1/NDF/1"},
    "MinBWAllocPercent": 25
  } ],
  "NetDevFuncMaxBWAlloc": [ {
    "NetworkDeviceFunction": {"@odata.id": "/redfish/v1/Chassis/1/NetworkAdapters/9fd725a1/NDF/11111111100"},
    "MaxBWAllocPercent": 100
  } ],
  "AssociatedNetworkAddresses": ["00:0C:29:9A:98:ED", "00:0C:29:9A:98:EF"],
  "EEEEnabled": true,
  "WakeOnLANEnabled": true,
  "PortMaximumMTU": 1500,
  "FlowControlStatus": "None",
  "FlowControlConfiguration": "None",
  "SignalDetected": true
}
```

Information on the current Port, it's connectivity and low level protocol port specifics

Bandwidth Min/Max per Func




Operations

- The majority of implementations are expected to have the Network Device Functions initially unassigned & un-configured.
 - For simplicity, many vendors will have some of the NetworkDeviceFunctions in an initial default state
 - This is to ensure some level of functionality “out of the box”
 - If the hardware supports X functions, those functions will always be there.
 - Note that physical hardware will have different capabilities that limit the combinations of NetworkDeviceFunctions configurations that can coexist on the same device
 - For example, if the Adapter only has one FC “logic block” per port in the silicon, then only one can be assigned and configured per port.
 - There may be additional affinities that are built into the hardware.
 - The current Redfish model does not expose these affinities & capabilities.



Thank you for watching!

- Redfish Standards
 - Schemas, Specs, Mockups, White Papers, FAQ, Educational Material & more
 - <http://www.dmtf.org/standards/redfish>
- Redfish Developer Hub
 - Redfish Interactive Explorer, Hosted Schema at Namespace & other links
 - <http://redfish.dmtf.org>
- SPMF (WG that defines Redfish)
 - Companies involved, Upcoming Schedules & Future work, Charter, Information on joining.
 - <http://www.dmtf.org/standards/spmf>

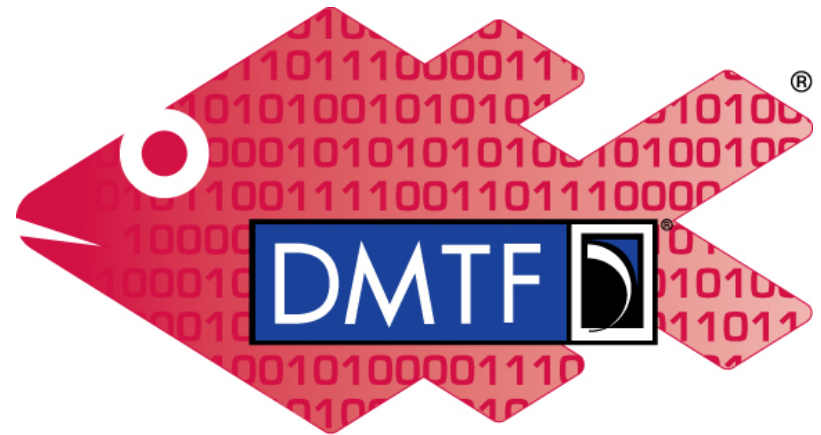

Redfish