# Accurately Communicating the DNT User Preference
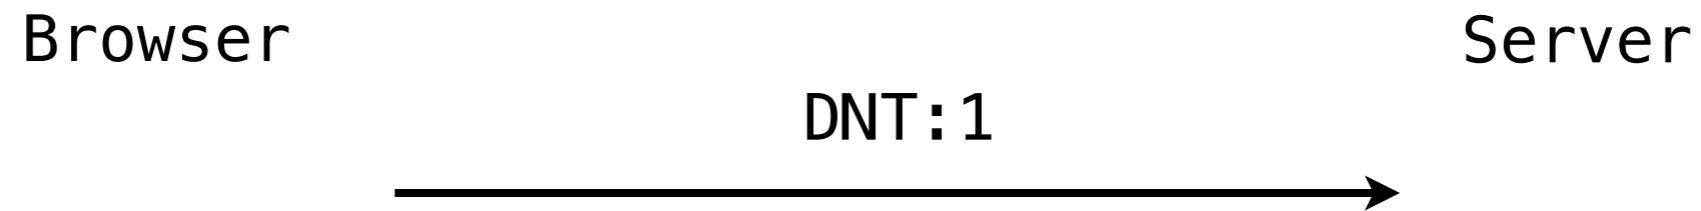
Browser                                                          Server

DNT:1

→

Q: In which cases is DNT header most difficult to process server-side?

Q: How useful would a DNT DOM property be?

Q: Can a DNT DOM property accurately mirror header? (Not easy today.)

# Accurately Communicating the DNT User Preference

Browser                                                Server

DNT:1
───────────────────────────────────────▶

◀───────────────────────────────────────
DNT:10
      ┆┆┆
      ┆┆┄┄▶1st bit: Ack
      ┆┄┄┄▶2nd bit: Pref respected?